


CRANES AND COMPONENTS

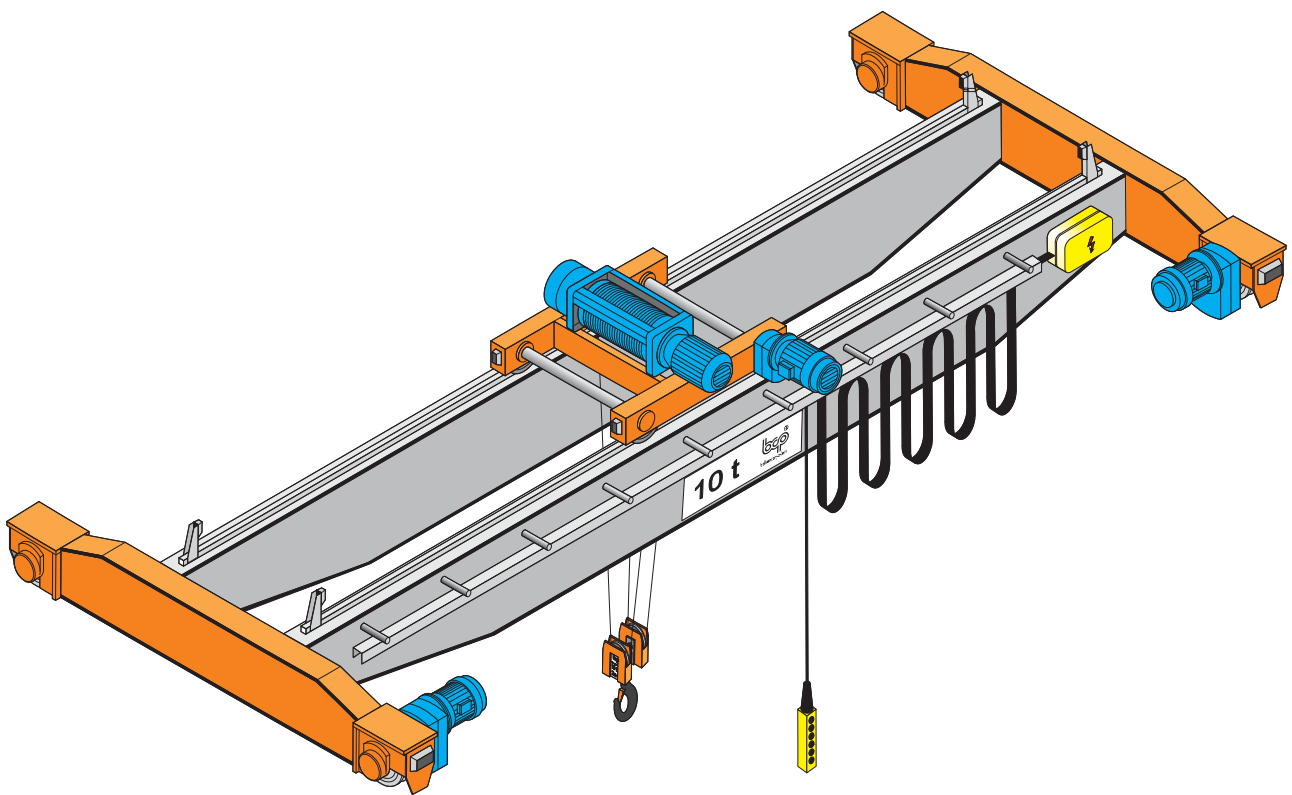

CONTENTS

INTRODUCTION.....	1
1. SINGLE GIRDER STANDING OVERHEAD TRAVELING CRANES	2
2. DOUBLE GIRDER STANDING OVERHEAD TRAVELING CRANES	4
3. SINGLE GIRDER STANDING CRANES - LIGHT TYPE	6
4. SINGLE GIRDER SUSPENSION OVERHEAD TRAVELING CRANES	8
5. DOUBLE RAIL CRANE CRAB	10
6. BLOCK TRAVEL WHEELS	12
7. MAXIMUM ADMISSIBLE STATIC LOADINGS ON TRAVEL WHEEL - R_{max} (kg) AND TORQUES - M (Nm)	13
8. MONORAIL CRANE CRABS	14

INTRODUCTION

The present catalogue includes unified single and double girder, standing and suspension general-purpose overhead traveling cranes. The cranes and their components are in series production; they are included in the production line of BALKANCARPODEM LTD, Sofia.

The cranes have light construction, based on:

- > wire rope electric hoists,
- > block travel wheels
- > and geared motors.

All cranes are equipped with squirrel-cage induction motors, thus allowing the use of a simple circuit diagram and control.

The cranes are designed to:

- > operate in medium mode of operation - 2m as per FEM and DIN;
- > standard and tropical execution;
- > surrounding temperature within the range of -20C to +40C;
- > power supply 3Ph 380V 50Hz.

We are also able to supply the cranes and their components for different voltage and frequency parameters.

The cranes and their components are supplied with one rated speed or two rated speeds (rated and creep). The cranes we show in the present catalogue are designed with control from the floor. We are in position to supply cranes with control from cabin at customer's request. Customers may order electric hoists with additional equipment:

- > load limiter
- > or (and) additional thermal protection of the lifting electric motor.

The cranes are not designed for handling liquid metal, loads with high temperature, dangerous loads (poisonous, explosive, etc.). Cranes cannot operate in explosive and fiery surroundings.

We are ready to discuss with customers the supply of overhead traveling cranes with parameters, mode of operation and designation different from these given in the present catalogue i.e. cranes equipped with electric magnet, gripper, etc.

We are in position to negotiate also the supply of different types of components and cranes:

- > single girder or double girder gantry (jib) cranes,
- > bracket cranes - column or wall type,
- > special cranes,
- > etc.

All hoisting units are designed on the basis of wire rope electric hoists, conforming to the norms of FEM, ISO and the Bulgarian State Standards /BSS/. Our products have TÜV certification and the CE mark. We show MH and MHM electric hoists in our catalogue.

Our products conform to the following norms:

- > 98/37/EC from 22.06.98 - Machinery Directive
- > EN 292 - Safety of machinery


Specialized laboratories, issuing the respective certificates perform the testing of the materials of the supporting elements - they are tested for their mechanical properties and chemical compound.

The electrodes and the welding seams of the welded constructions are made under control, to prove their quality.

REMARK: *The manufacturer reserves the right to alter the above stated components at his judgment.*

1. SINGLE GIRDER STANDING OVERHEAD TRAVELING CRANES

1.1. Main parameters and dimensions

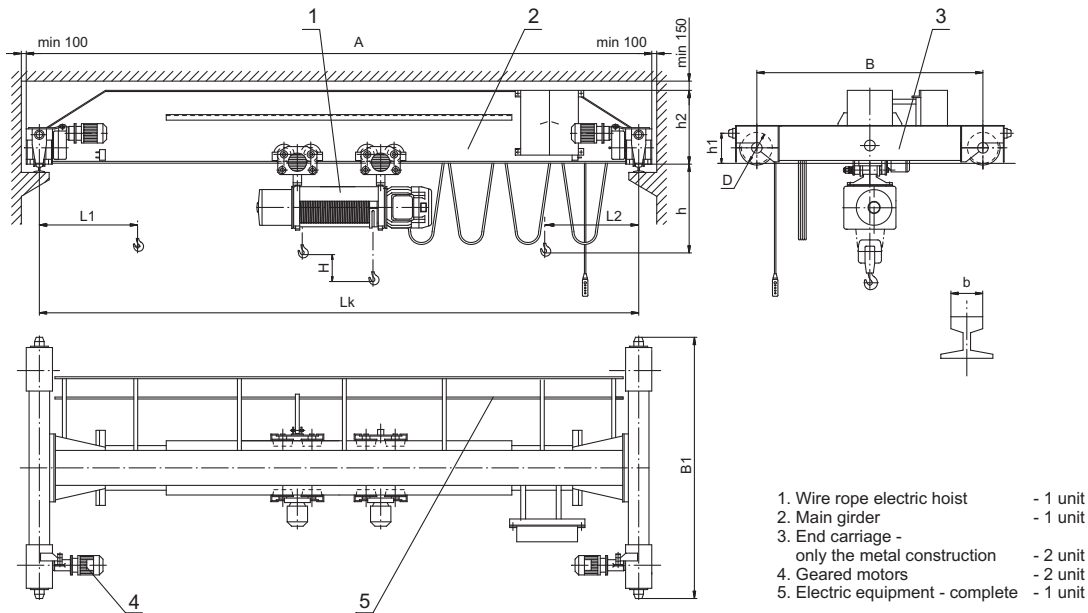


Designation	Capacity, Q	Span Lk	Lifting height H	Speeds			Dimensions								Rmax (Maximum pressure on travel wheel)
				of lift	of crab	of crane	A	B	B1	D	b	h	h1	h2	
-	t	m		m/min			mm								kN
BCE-B 5/10,5	5	10,5	7 ... 40	8 8/2	20 20/6	20/6	10780	2000	2340	160	40	1505	160	520	35
BCE-B 5/16,5		16,5					16780	3000	3340					675	38
BCE-B 5/22,5		22,5					22840	4000	4380					820	41
BCE-B 5/28,5		28,5					28840	4000	4380					1050	45
BCE-B 6,3/10,5	6,3	10,5	5 ... 18	4 4/1	20 20/6	20/6	10840	2000	2380	200	50	1275	200	615	42
BCE-B 6,3/16,5		16,5					16840	3000	3380					815	45
BCE-B 6,3/22,5		22,5					22840	4000	4380					970	48
BCE-B 6,3/28,5		28,5					28840	4000	4380					1050	53
BCE-B 8/10,5	8	10,5	7 ... 34	8 8/2	20 20/6	20/6	10840	2000	2380	200	50	1725	200	615	50
BCE-B 8/16,5		16,5					16840	3000	3500					815	54
BCE-B 8/22,5		22,5					22840	4000	4500					970	59
BCE-B 8/28,5		28,5					28840	4000	4500					1050	65
BCE-B 10/10,5	10	10,5	5 ... 20	4 4/1	20 20/6	20/6	10840	2000	2500	250	50	1580	250	675	63
BCE-B 10/16,5		16,5					16840	3000	3500					970	68
BCE-B 10/22,5		22,5					22870	4000	4500					980	75
BCE-B 10/28,5		28,5					28870	4000	4500					1110	80
BCE-B 12,5/10,5	12,5	10,5	8 ... 17	4 4/1	20 20/6	20/6	10840	2000	2500	250	50	1710	250	770	79
BCE-B 12,5/16,5		16,5					16840	3000	3500					970	82
BCE-B 12,5/22,5		22,5					22870	4000	4590					980	89
BCE-B 12,5/28,5		28,5					28870	4000	4590					1250	95

Remarks:

*) Sizes L1 and L2 depend on the hoist type and the lifting height

1.2. End carriages

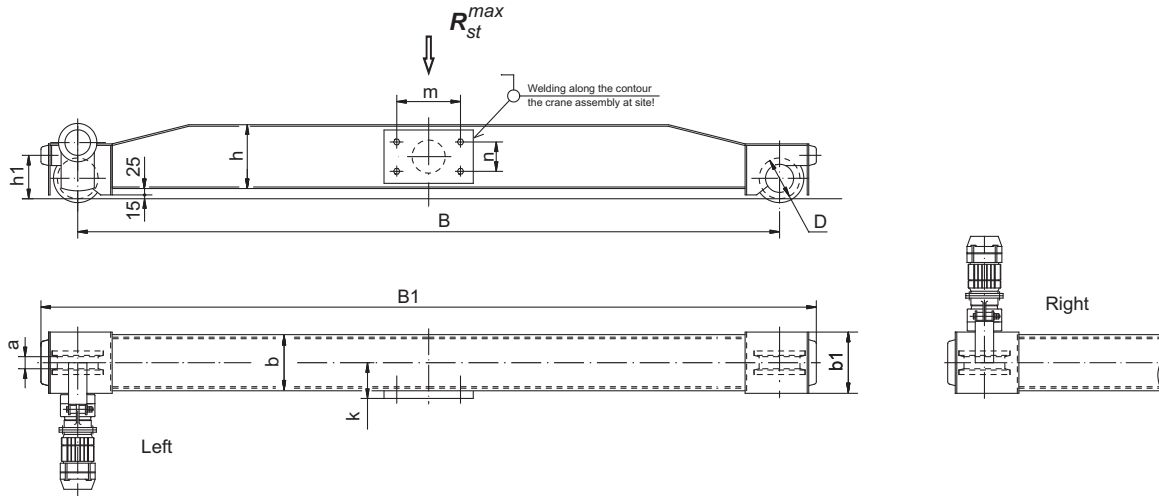

Designation	Capacity, Q	Span Lk	Speeds	Geared motor		Dimensions											R _{st} ^{max}
				Type	Output	D	B	B1	a	b	h	b1	h1	k	m	n	
-	t	m	m/min	-	kW	mm											kN
ECE-B 00	5	10,5	20/6	TP1200-35 T90S-12/4	0,18/0,55	160	2000	2340	55	240	280	240	160	150	600	140	79
ECE-B 01		3000					3340	330			190					80	
ECE-B 02		4000				4380	400	260	83								
ECE-B 03		4000				4380	420	280	112								
ECE-B 04	6,3	10,5	20/6	TP1250-46 T90S-12/4	0,18/0,55	200	2000	2380	65	250	280	270	200	600	140	87	
ECE-B 05		3000					3380	330			190				92		
ECE-B 06		4000				4380	420	280	112								
ECE-B 07		4000				4380	420	280	112								
ECE-B 08	8	10,5	20/6	TP1250-46 T90S-12/4	0,18/0,55	200	2000	2380	65	270	330	270	200	600	190	110	
ECE-B 09		3000					3500	400			180				117		
ECE-B 10		4000		4500		460	320	139									
ECE-B 11		4000		4500		460	320	139									
ECE-B 12	10	10,5	20/6	TP1250-54 T90S-12/4	0,18/0,55	250	2000	2500	65	300	400	324	250	600	260	131	
ECE-B 13		3000					3500	460			320				140		
ECE-B 14		4000		4500		520	380	165									
ECE-B 15		4000		4500		520	380	165									
ECE-B 16	12,5	10,5	20/6	TP1315-54 T90L-12/4	0,25/0,75	250	2000	2500	65	300	400	324	250	600	260	166	
ECE-B 17		3000					3500	460			320				172		
ECE-B 18		4000		4590		550	410	200									
ECE-B 19		4000		4590		550	410	200									

Remarks:

*) R_{st}^{max} - Maximum static loading (kN)


$$R_{st}^{max} \approx \left[\frac{G_{crane}}{2} + (Q + G_{hoist}) \right] \cdot 10 \text{ (kN)}$$

Where:

G_{crane} - crane dead weight (t);
 Q - crane rated capacity (t);
 G_{hoist} - el. hoist dead weight (t)

2. DOUBLE GIRDER STANDING OVERHEAD TRAVELING CRANES

2.1. Main parameters and dimensions

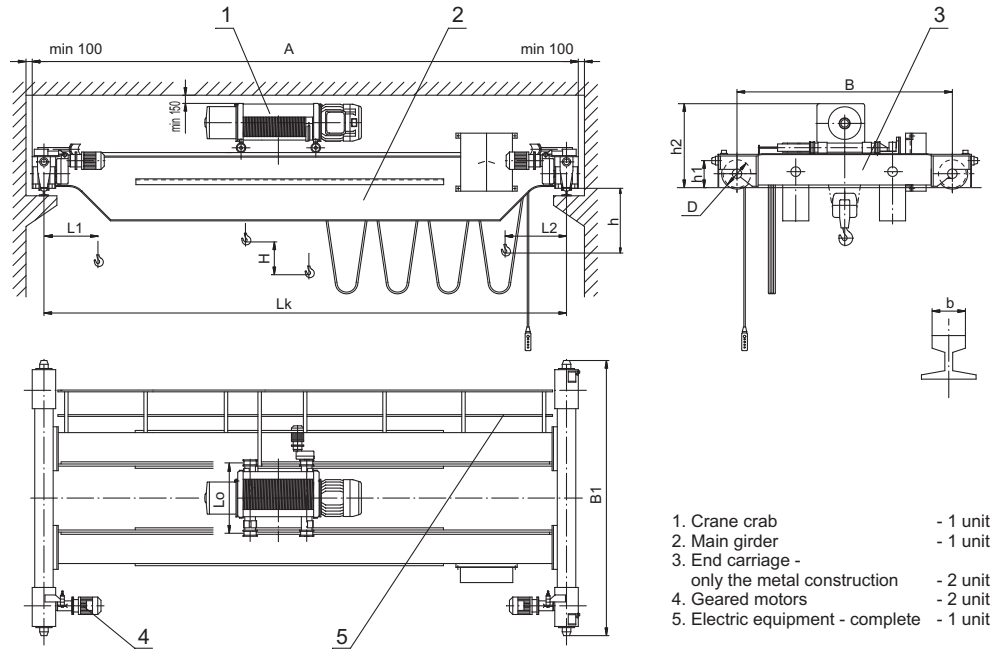


Designation	Capacity, Q	Span Lk	Lifting height H	Speeds			Dimensions								Rmax (Maximum pressure on travel wheel)	
				of lift	of crab	of crane	A	B	B1	D	b	Lo	h, min	h1		h2
-	t	m		m/min			mm								kN	
BCD-B 5/10,5	5	10,5	7 ... 40	8 8/2	20 20/6	20/6	10785	3500	3880	200	50	1000	248	200	1150	44
BCD-B 5/16,5		16,5					16785	3500	3880				248		1150	50
BCD-B 5/22,5		22,5					22785	4000	4380				208		1190	58
BCD-B 5/28,5		28,5					28840	4200	4695				188		1200	69
BCD-B 6,3/10,5	6,3	10,5	5 ... 18	4 4/1	20 20/6	20/6	10785	3500	3880	200	50	1000	248	200	1070	52
BCD-B 6,3/16,5		16,5					16785	3500	3880				248		1070	58
BCD-B 6,3/22,5		22,5					22840	4000	4495				188		1140	67
BCD-B 6,3/28,5		28,5					28840	4200	4695				148		1180	78
BCD-B 8/10,5	8	10,5	7 ... 34	8 8/2	20 20/6	20/6	10840	3500	3995	250	50	1000	248	250	1240	61
BCD-B 8/16,5		16,5					16840	3500	3995				248		1240	69
BCD-B 8/22,5		22,5					22840	4000	4495				188		1290	77
BCD-B 8/28,5		28,5					28840	4200	4790				128		1350	90
BCD-B 10/10,5	10	10,5	5 ... 20	4 4/1	20 20/6	20/6	10840	3500	3995	250	50	1000	193	250	1170	78
BCD-B 10/16,5		16,5					16840	3500	4090				173		1190	85
BCD-B 10/22,5		22,5					22840	4000	4590				113		1250	95
BCD-B 10/28,5		28,5					28880	4200	4830				85		1280	108
BCD-B 12,5/10,5	12,5	10,5	8 ... 17	4 4/1	20 20/6	20/6	10840	3500	4090	320	50	1200	163	290	1330	87
BCD-B 12,5/16,5		16,5					16840	3500	4090				163		1330	95
BCD-B 12,5/22,5		22,5					22880	4000	4630				75		1430	107
BCD-B 12,5/28,5		28,5					28880	4200	4830				75		1430	119
BCD-B 16/10,5	16	10,5	8 ... 17	4 4/1	20 20/6	20/6	10840	3500	4090	320	50	1200	253	290	1370	107
BCD-B 16/16,5		16,5					16880	3500	4130				253		1390	115
BCD-B 16/22,5		22,5					22880	4000	4630				205		1430	128
BCD-B 16/28,5		28,5					28880	4200	4830				155		1480	142
BCD-B 20/10,5	20	10,5	8 ... 17	3,2 3,2/0,8	20 20/6	20/6	10880	3500	4130	400	70	1400	205	370	1420	130
BCD-B 20/16,5		16,5					16880	3500	4130				205		1420	139
BCD-B 20/22,5		22,5					22880	4000	4630				155		1480	150
BCD-B 20/28,5		28,5					28880	4200	4830				155		1480	166

Remarks:

*) Sizes L1 and L2 depend on the hoist type and the lifting height

2.2. End carriages

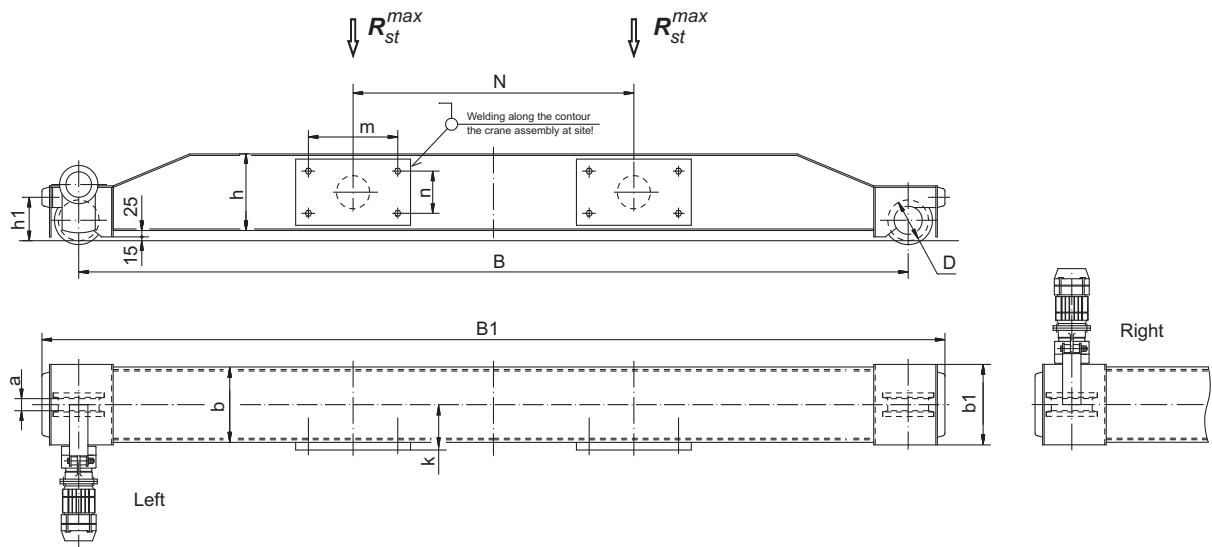

Designation	Capacity, Q	Span Lk	Speeds	Geared motor		Dimensions												R _{st} ^{max}			
				Type	Output	D	B	B1	a	b	b1	h	h1	k	m	n	N				
-	t	m	m/min	-	kW	mm												kN			
ECD-B 00	5	10,5	20/6	TP1250-46 T90S-12/4	0,18/0,55	200	3500	3880	65	270	270	400	200	165	330	260	1224	54			
ECD-B 01		16,5				4000	4380	470				300		1364	54						
ECD-B 02		22,5				4000	4380	620				300		1514	60						
ECD-B 03	28,5	6,3	20/6	TP1250-54 T90S-12/4	0,18/0,55	250	4200	4695	65	300	324	460	250	180	710	320	1604	71			
ECD-B 04	10,5					3500	3880	330				260		1224	54						
ECD-B 05	16,5					4000	4380	470				300		1364	73						
ECD-B 06	22,5	8	20/6	TP1250-54 T90S-12/4	0,25/0,75	250	4000	4495	65	300	324	460	250	180	620	320	1514	69			
ECD-B 07	28,5					4200	4695	320				324		500	250	190	710	360	1604	81	
ECD-B 08	10,5					3500	3995	360				260		1254	73						
ECD-B 09	16,5	10	20/6	TP1250-54 T90L-12/4	0,18/0,55	250	3500	3995	65	300	324	400	250	180	470	260	1363	73			
ECD-B 10	22,5					4000	4495	620				320		1513	81						
ECD-B 11	28,5					4200	4790	70				320		380	300	1273	82				
ECD-B 12	10,5	12,5	20/6	TP1315-70 T100LA-12/4	0,25/0,75	320	4200	4790	70	320	324	460	290	190	640	380	1532	100			
ECD-B 13	16,5					4000	4590	70				320		520	290	190	640	380	1532	100	
ECD-B 14	22,5					4200	4830	85				340		365	550	370	200	710	406	1601	125
ECD-B 15	28,5	16	20/6	TP1315-70 T100LA-12/4	0,37/1,1	400	4200	4830	85	340	365	550	370	200	710	406	1601	125			
ECD-B 16	10,5					3500	4090	70				300		324	460	290	180	380	320	1473	100
ECD-B 17	16,5					4000	4090	70				300		324	460	290	180	500	320	1592	100
ECD-B 18	22,5	20	20/6	TP1315-86 T100LA-12/4	0,37/1,1	400	4000	4630	85	340	365	550	370	200	640	406	1732	137			
ECD-B 19	28,5					4200	4830	85				340		365	550	370	200	710	406	1801	137
ECD-B 20	10,5					3500	4090	70				320		324	500	290	190	440	360	1532	117
ECD-B 21	16,5	20	20/6	FA87 SDT100LS-8/2-BM2/Z	0,45/1,80	400	4000	4630	85	340	365	550	370	200	610	406	1700	137			
ECD-B 22	22,5					4200	4830	85				340		365	550	370	200	610	406	1700	137
ECD-B 23	28,5					4200	4830	85				340		365	600	370	212	710	456	1800	151
ECD-B 24	10,5	20	20/6	FA87 SDT100LS-8/2-BM2/Z	0,60/2,40	400	3500	4130	85	340	365	550	370	200	460	406	1751	142			
ECD-B 25	16,5					3500	4130	560				406		1849	151						
ECD-B 26	22,5					4000	4630	660				456		1949	162						
ECD-B 27	28,5					4200	4830	760				452		2048	178						

Remarks:

*) R_{st}^{max} - Maximum static loading (kN)

$$R_{st}^{max} \approx \frac{1}{2} \left[\frac{G_{crane}}{2} + (Q + G_{crab}) \right] \cdot 10 \text{ (kN)}$$


Where:

G_{crane} - crane dead weight (t);
 Q - crane rated capacity (t);
 G_{crab} - crane crab weight (t)

**) Output revolutions of the gear units FA87 ... - n_a = 4/17 min⁻¹

3. SINGLE GIRDER STANDING CRANES - LIGHT TYPE

3.1. Main parameters and dimensions

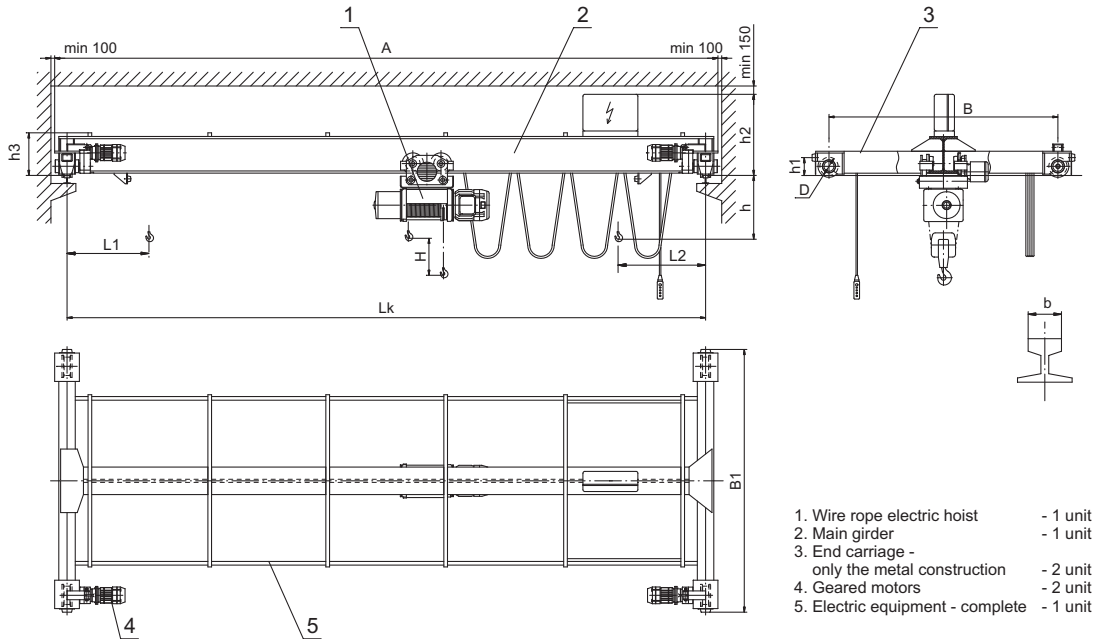


Designation	Capacity, Q	Span Lk	Lifting height H	Speeds			Dimensions									Rmax (Maximum pressure on travel wheel)	
				of lift	of crab	of crane	A	B	B1	D	b	h	h1	h2	h3		
-	t	m		m/min			mm									kN	
MEA 1/7,5	1	7,5	5 ... 51	8 8/2	20 20/6	20/6	7740	1600	1938	160	40	990	160	735	335	11,5	
MEA 1/10,5		10740					2000	2338	735					335	13		
MEA 1/13,5		13740					2700	3038	755					355	14		
MEA 1/16,5		16,5					1190	735	335					19			
MEA 2/7,5	2	7,5	5 ... 45	8 8/2	20 20/6	20/6	7740	1600	1938	160	40	1210	160	735	335	19	
MEA 2/10,5		10740					2000	2338	775					375	20		
MEA 2/13,5		13740					2700	3038	795					395	21		
MEA 2/16,5		16,5					1260	775	375					27			
MEA 3,2/7,5	3,2	7,5	5 ... 37	8 8/2	20 20/6	20/6	7740	1600	1938	160	40	1265	160	775	375	27	
MEA 3,2/10,5		10740					2000	2338	805					405	28		
MEA 3,2/13,5		13740					2700	3038	875					475	30		
MEA 3,2/16,5		16,5					1535	805	405					38			
MEA 5/7,5	5	7,5	7 ... 40	8 8/2	20 20/6	20/6	7740	1600	1938	160	40	1530	160	865	465	40	
MEA 5/10,5		10740					2000	2338	895					495	41		
MEA 5/13,5		13740					2700	3038	1540					1210	865	465	46
MEA 5/16,5		16,5					10770	2000	2378					925	525	48	
MEA 6,3/7,5	6,3	7,5	5 ... 18	4 4/1	20 20/6	20/6	7770	1600	1978	200	50	1205	200	865	465	46	
MEA 6,3/10,5		10770					2000	2378	925					525	48		
MEA 6,3/13,5		13770					2700	3078	955					555	49		
MEA 6,3/16,5		16,5					1640	925	525					57			
MEA 8/7,5	8	7,5	7 ... 34	8 8/2	20 20/6	20/6	7770	1600	1978	200	50	1660	200	925	525	57	
MEA 8/10,5		10770					2000	2378	955					555	60		
MEA 8/13,5		13824					2700	3196	1015					615	61		
MEA 8/16,5		16,5					250	1015	615					61			

Remarks:

*) Sizes L1 and L2 depend on the hoist type and the lifting height


3.2. End carriages

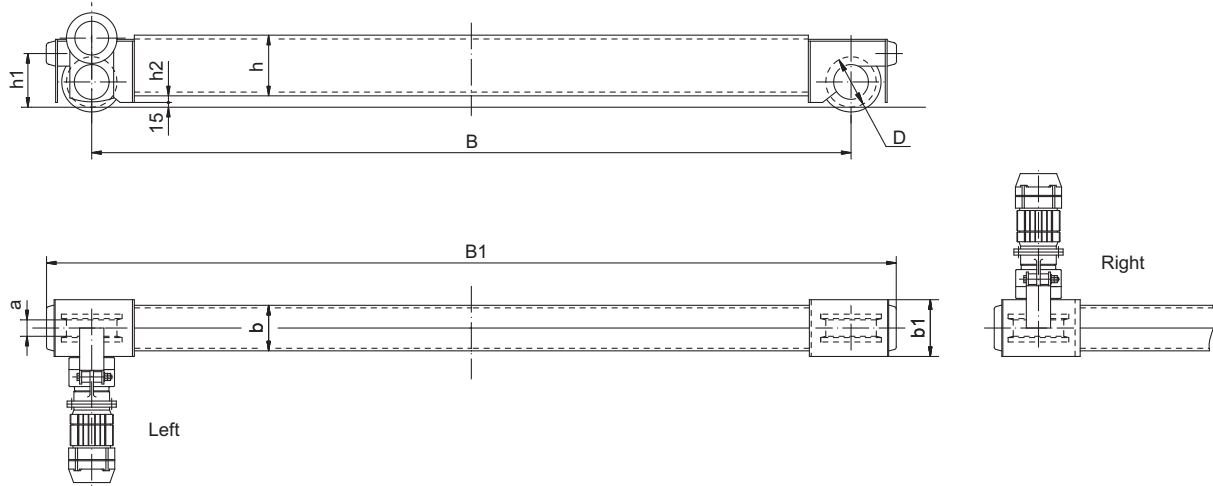

Designation	Capacity, Q	Span Lk	Speeds	Geared motor		Dimensions								
				Type	Output	D	B	B1	a	b	b1	h	h1	h2
-	t	m	m/min	-	kW	mm								
MEA 02-00	1	7,5	20/6	TP1160-35 T80A-12/4	0,08/0,25	160	1600	1938	55	116	240	140	160	60
MEA 02-01		2000					2338	128		160		40		
MEA 02-02		2700					3038	140		180		20		
MEA 02-03		3000					3338	152		200		35		
MEA 02-04	2	7,5	20/6	TP1160-35 T80B-12/4	0,12/0,37	160	1600	1938	55	128	240	160	160	40
MEA 02-05		2000					2338	140		180		20		
MEA 02-06		2700					3038	164		220		20		
MEA 02-07		3000					3338	164		220		20		
MEA 02-08	3,2	7,5	20/6	TP1200-35 T90S-12/4	0,18/0,55	160	1600	1938	55	152	240	200	160	40
MEA 02-09		2000					2338	164		220		30		
MEA 02-10		2700					3038	180		240		40		
MEA 02-11		3000					3338	190		270		40		
MEA 02-12	5	7,5	20/6	TP1200-35 T90S-12/4	0,18/0,55	160	1600	1938	55	164	240	220	160	30
MEA 02-13		2000					2338	180		240		30		
MEA 02-14		2700					3038	190		270		20		
MEA 02-15		3000					3338	200		300		20		
MEA 02-16	6,3	7,5	20/6	TP1250-46 T90S-12/4	0,18/0,55	200	1600	1978	65	164	270	220	200	30
MEA 02-17		2000					2378	180		240		50		
MEA 02-18		2700					3078	200		300		30		
MEA 02-19		3000					3378	200		300		30		
MEA 02-20	8	7,5	20/6	TP1250-46 T90S-12/4	0,18/0,55	200	1600	1978	65	180	270	240	200	50
MEA 02-21		2000					2378	190		270		30		
MEA 02-22		TP1250-54 T90S-12/4		2700	3196	250	210	324		330		250	40	
MEA 02-23				3000	3496		220			360			30	
MEA 02-24	10	7,5	20/6	TP1250-54 T90S-12/4	0,18/0,55	250	1600	2096	65	220	324	360	250	30
MEA 02-25		2000					2496	220		360		30		
MEA 02-26		2700					3196	230		400		30		
MEA 02-27		3000					3496	230		400		30		

4. SINGLE GIRDER SUSPENSION OVERHEAD TRAVELING CRANES

4.1. Main parameters and dimensions

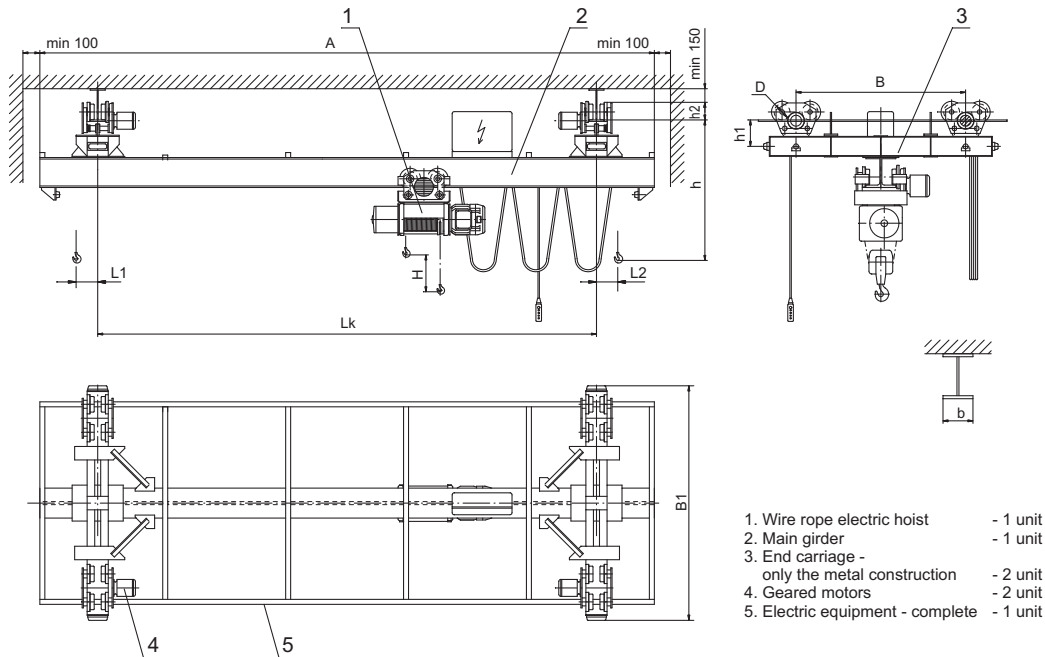


Designation	Capacity, Q	Span Lk	Lifting height H	Speeds			Dimensions								Rmax (Maximum pressure on travel wheel)
				of lift	of crab	of crane	A	B	B1	D	b	h ~	h1	h2	
-	t	m		m/min			mm								kN
MES 0,5/7	0,5	7	6 ... 51	8	20	20/6	8000	1200	1720	100	90 ... 130	1370	190	132	7
MES 0,5/10		10					12400	1700	2200			1410			7,5
MES 0,5/12		12					14400	2000	2520			1430			8
MES 1/7	1	7	6 ... 51	8	20	20/6	8000	1200	1720	100	130 ... 150	1390	190	132	10,5
MES 1/10		10					12400	1700	2200			1430			11,5
MES 1/12		12					14400	2000	2520			1450			12
MES 2/7	2	7	5 ... 45	8	20	20/6	8000	1200	1770	125	130 ... 150	1630	220	155	17
MES 2/10		10					12400	1700	2270			1670			18
MES 2/12		12					14400	2000	2570			1710			19,5
MES 3,2/7	3,2	7	5 ... 37	8	20	20/6	8000	1200	1770	125	130 ... 150	1720	220	155	25
MES 3,2/10		10					12400	1700	2340			1795			26
MES 3,2/12		12					14400	2000	2640			1815			27
MES 5/7	5	7	7 ... 40	8	20	20/6	8000	1200	1840	160	130 ... 150	2085	265	187	36
MES 5/10		10					12400	1700	2340			2125			37
MES 5/12		12					14400	2000	2640			2165			38
MES 8/7	8	7	7 ... 37	8	20	20/6	8000	1200	1840	160	130 ... 150	2255	265	187	56
MES 8/10		10					12400	1700	2340			2295			57
MES 8/12		12					14400	2000	2640			2345			58

Remarks:

*) Sizes L1 and L2 depend on the hoist type and the lifting height




4.2. End carriages

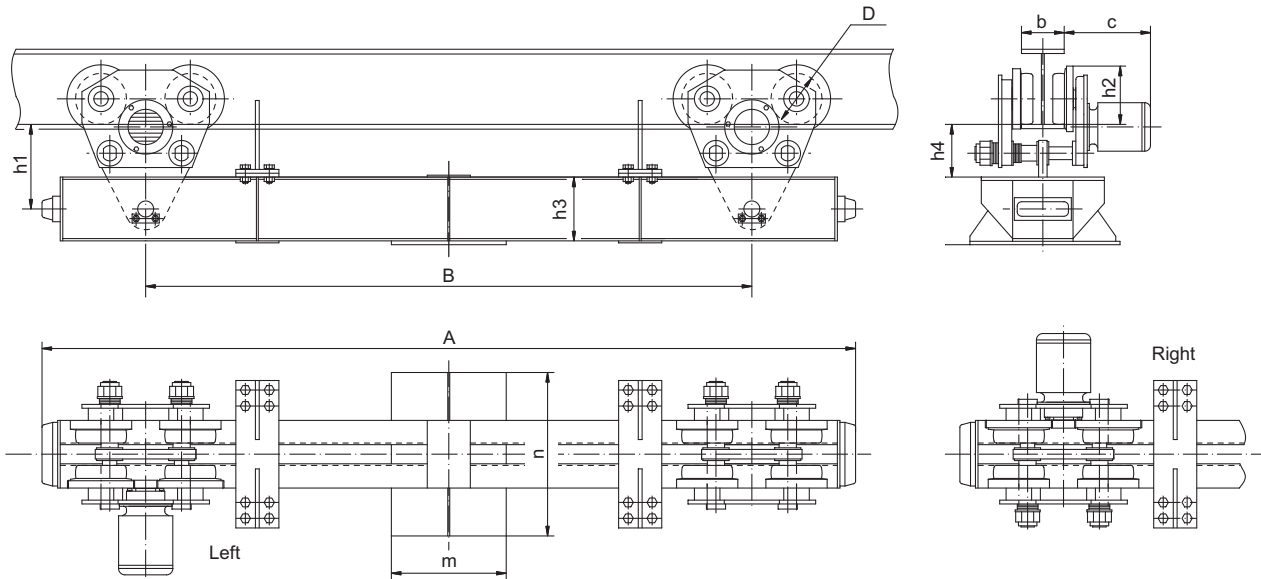

Designation	Capacity, Q	Span Lk	Speeds	Monorail crane crab			Dimensions										
				Type	El. motor, type	Output	A	B	D	b	c max	h1	h2	h3	h4	m	n
-	t	m	m/min	-	-	kW	mm										
MES 01-00		7					1720	1200						120		220	445
MES 01-01	0,5	10	20/6	EK 100 B	KK 1405-12/4A	0,06/0,18	2220	1700	100	90 ... 130	310	190	132	120	130	260	457
MES 01-02		12					2520	2000						140		280	457
MES 01-03		7					1720	1200						120		240	445
MES 01-04	1	10	20/6	EK 100 B	KK 1405-12/4	0,06/0,18	2220	1700	100	90 ... 130	310	190	132	140	130	280	457
MES 01-05		12					2520	2000						160		300	469
MES 01-06		7					1770	1200						140		280	462
MES 01-07	2	10	20/6	EK 125 B	KK 1407-12/4	0,11/0,37	2270	1700	125	130 ... 150	360	220	155	160	148	320	474
MES 01-08		12					2570	2000						180		360	486
MES 01-09		7		EK 125 B	KK 1407-12/4	0,11/0,37	1770	1200	125		360	220	155	160	148	300	474
MES 01-10	3,2	10	20/6	EK 160 B	KK 1407-12/4	0,11/0,37	2340	1700	160	130 ... 150	365	265	187	200	165	360	512
MES 01-11		12					2640	2000						200			
MES 01-12		7					1840	1200	160					200			512
MES 01-13	5	10	20/6	EK 160 B	KK 1407-12/4	0,11/0,37	2340	1700		130 ... 150	365	265	187	220	165	360	524
MES 01-14		12					2640	2000						240			540
MES 01-15		7					1840	1200						220			524
MES 01-16	8	10	20/6	EK 160 B	KK 1407-12/4	0,11/0,37	2340	1700	160	130 ... 150	365	265	187	270	165	360	550
MES 01-17		12					2640	2000						300			560

5. DOUBLE RAIL CRANE CRABS

5.1. Light type

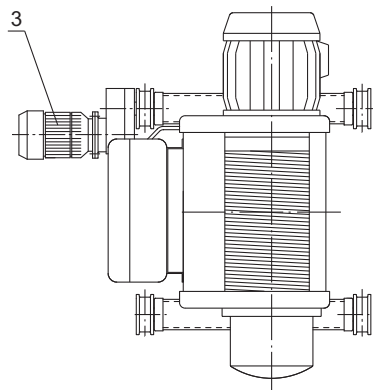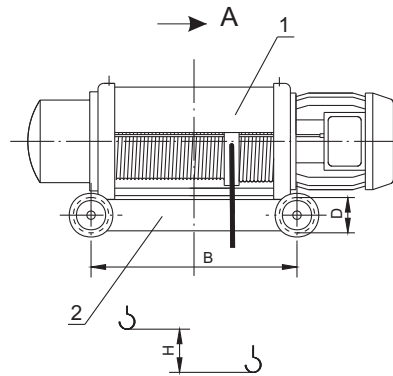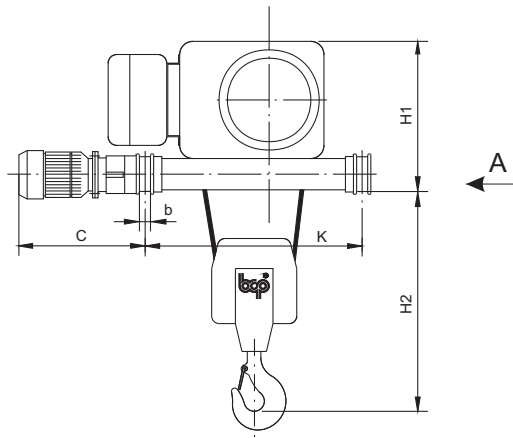


- 1. Wire rope electric hoist - (1 unit)
- 2. Frame with travel wheels - (1 unit)
- 3. Geared motor - (1 unit)

Capacity t	Height of lift H *) m	Speed of lift / of travel		K	B *)	H1	H2	c max	D	b
		m/min								
2	6 ... 24	8/2	20/5	1000	431 ... 2075	536	415	480	160	50
3,2		8/2		1000		536	620	480	160	50
4		4/1		1000		536	710	480	160	50
5		8/2		1000		602	510	480	160	50
6.3		4/1		1000		536	840	760	160	50
8		8/2		1000		700	840	760	160	50
10		4/1		1000		602	1100	800	160	50
12,5		8/2		1200		740	840	760	200	60
16		4/1		1200		740	1100	800	200	60
20		3,2/0,8		1400		740	1100	800	250	60

Remarks:

*) Depends on the hoist type, the lifting height and the reeving.

5.2. With two lift

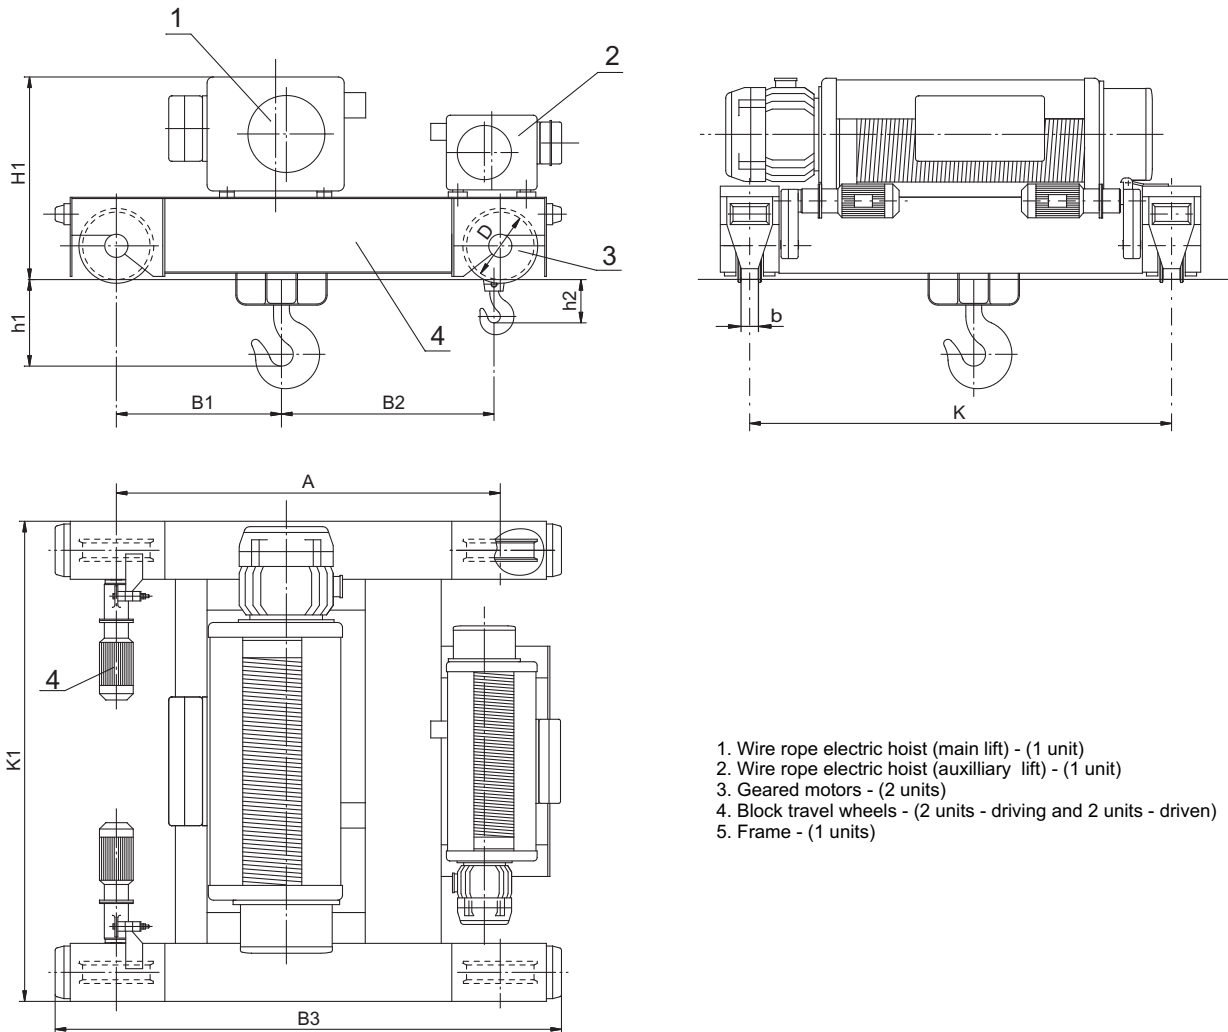

1. Wire rope electric hoist (main lift) - (1 unit)
2. Wire rope electric hoist (auxiliary lift) - (1 unit)
3. Geared motors - (2 units)
4. Block travel wheels - (2 units - driving and 2 units - driven)
5. Frame - (1 units)

Main parameters and dimensions


Capacity Q (main/aux.), t	Height of lift (main/aux.), m	Speeds, m/min			Dimensions, mm										
		main lift	aux. lift	Travel	K	A	B1	B2	B3	K1	H1	h1	h2	D	b
16/3,2	14/17	4/1				~1760	715	825		2270	870	190	280	250	65
20/5	14/17	3,2/0,8	8/2	20/6	2000	~1820	783	822	2400	2275	963	515	295	320	70
32/8	14/17	2,2/0,5				~1920	805	900		2285	1053	425	335	400	85

Components


Capacity Q (main/aux.), t	Pos. 1	Pos. 2	Pos. 3	Pos. 4
	Electric hoist (main lift) - (1 unit)	Electric hoist (aux. lift) - (1 unit)	Geared motors - (2 units)	Block travel wheels - (2 units - driving and 2 units - driven)
16/3,2	MH 7-40 4/1 H14 V4/1	MHM 5-16 2/1 H17 V8/2	TP1200-54 T90S-12/4R BR11	2 x MAM250 and 2 x MAL250
20/5	MH 7-50 4/1 H14,5 V3,2/0,8	MH 6-25 2/1 H16,5 V8/2	TP1200-69 T90S-12/4R BR11	2 x MAM320 and 2 x MAL320
32/8	MH 7-80 4/1 H14,5 V2,2/0,5	MH 7-40 2/1 H16,5 V8/2	TP1250-88 T90L-12/4R BR11	2 x MAM400 and 2 x MAL400

6. BLOCK TRAVEL WHEELS


Diagram

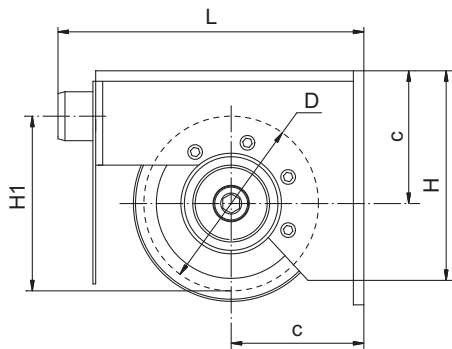

Type MAM ... - drive

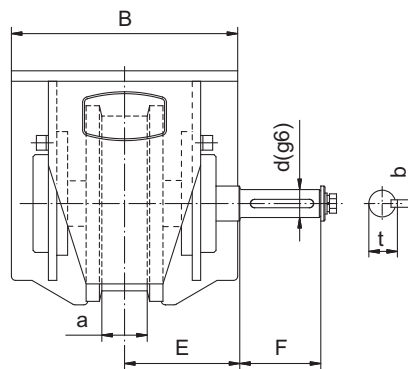

Type MAL ... - driven

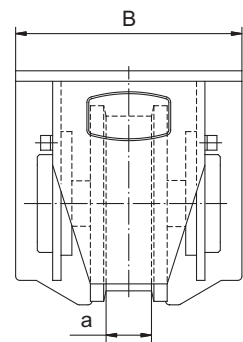

Designation	Dimensions												Weight
	D	L	H	H1	B	a	c	d	E	F	b	t	
-	mm												kg
MAM 125	125	288	172	132	200	55	125	30	103	95	8	33	28
MAL 125	-	-	-	-	-	-	-	-	-	-	-	-	27
MAM 160	160	304	200	160	240	55	160	30	123	95	8	33	40
MAL 160	-	-	-	-	-	-	-	-	-	-	-	-	39
MAM 200	200	354	250	200	270	65	165	40	138	116	12	43	68
MAL 200	-	-	-	-	-	-	-	-	-	-	-	-	66
MAM 250	250	438	300	250	324	65	190	40	165	116	12	43	94
MAL 250	-	-	-	-	-	-	-	-	-	-	-	-	92
MAM 320	320	526	375	291	324	70	230	50	165	140	14	53,5	167
MAL 320	-	-	-	-	-	-	-	-	-	-	-	-	164
MAM 400	400	596	465	370	365	85	280	50	185,5	140	14	53,5	236
MAL 400	-	-	-	-	-	-	-	-	-	-	-	-	232

Remarks:

*) When placing an order the customer has to give sizes d, F, b and t, if they are different from the sizes in the table




7. MAXIMUM ADMISSIBLE STATIC LOADINGS ON TRAVEL WHEEL - Rmax (kg) AND TORQUES - M (Nm)

D	Rail	Resource To	Mode of operation	Rmax						M	
				Speed, m/min						Mnom	Mmax
				10	20	30	40	50	60		
mm	hours	-	kg						Nm		
125	?40	800	1Am	4200	3800	3700	3400	3100	2800	288	1384
		1600	2m	3400	3000	2800	2500	2100	1800		
		3200	3m	2900	2700	2500	2300	2000	1700		
		6300	4m	2400	2200	2000	1800	1600	1400		
		12500	5m	2000	1800	1600	1400	1200	1000		
160	?40	800	1Am	4800	4300	4100	4000	3800	3600	288	1384
		1600	2m	4300	4100	3600	3400	3200	3000		
		3200	3m	3600	3300	2900	2700	2500	2300		
		6300	4m	3100	2700	2400	2100	1900	1700		
		12500	5m	2600	2200	1900	1600	1400	1200		
200	?50	800	1Am	6900	6700	6400	5000	4800	4600	684	3284
		1600	2m	6000	5900	5100	4500	4200	3900		
		3200	3m	4900	4800	4100	3800	3400	3000		
		6300	4m	4000	3900	3100	2800	2500	2200		
		12500	5m	3100	3000	2200	1900	1500	1300		
250	?50	800	1Am	8800	8600	8500	8300	8000	7500	684	3284
		1600	2m	8700	8500	7700	7000	6000	5000		
		3200	3m	8300	7000	6200	5600	5000	4000		
		6300	4m	7000	5600	4800	4400	4000	3500		
		12500	5m	5000	4600	3800	3400	2800	2000		
320	?50	800	1Am	11500	11300	10800	10700	10500	10200	1328	6378
		1600	2m	11200	10900	10500	10000	9000	8500		
		3200	3m	10800	10000	8500	8000	7000	6000		
		6300	4m	8500	7900	6800	6200	5200	4600		
		12500	5m	7000	6400	5300	4700	3700	2900		
400	?70	800	1Am	16300	15800	15200	14300	13400	12000	1328	6378
		1600	2m	14800	14400	13800	13100	12400	11 000		
		3200	3m	12500	11 900	11 500	11 000	10000	9000		
		6300	4m	10800	10000	9000	8300	7500	6200		
		12500	5m	9400	8500	7500	6800	5500	4500		

8. MONORAIL CRANE CRABS

Type EK - electric (drive)

Type SK - push travel (driven)

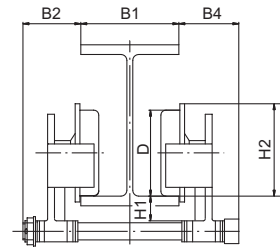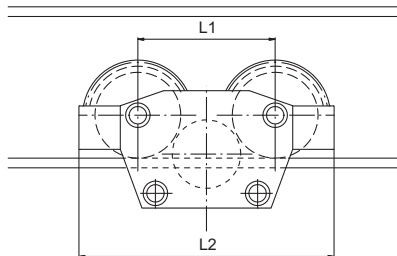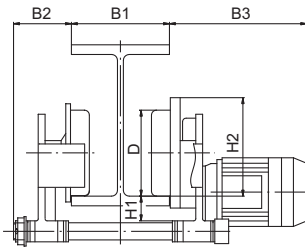

Type	D	Speed	El. motor		Max. load	B1	B2, max	B3, max	B4	H1	H2	L1	L2
			Type	kW									

Type EK

EK 100B-8	100	8	KK 1204-6A	0,12	1200	90 ... 130 130 ... 300	100	310	-	45	132	215	400
EK 100B-10		10											
EK 100B-12		12											
EK 100B-15		15	KK 1204-4A	0,18									
EK 100B-20		20	KK 1204-6A	0,12									
EK 100B-32		32	KK 1204-4A	0,18									
EK 100B-12/4		12/4	KK 1405-12/4A	0,06/0,18									
EK 100B-15/5		15/5											
EK 100B-20/6,5		20/6,5											
EK 125B-8	125	8			KK 1405-6A	0,25	3650	130 ... 150 150 ... 300	115	360	-	42,5	155
EK 125B-10		10											
EK 125B-12		12											
EK 125B-15		15	KK 1405-4A	0,37									
EK 125B-20		20	KK 1405-6A	0,25									
EK 125B-32		32	KK 1405-4A	0,37									
EK 125B-12/4		12/4	KK 1407-12/4A	0,11/0,37									
EK 125B-15/5		15/5											
EK 125B-20/6,5		20/6,5											
EK 125B-32/10	32/10												
EK 160B-8	160	8	KK 1405-6A	0,25	5650	130 ... 150 150 ... 300	120	365	-	45	187	280	520
EK 160B-10		10											
EK 160B-12		12											
EK 160B-15		15	KK 1405-4A	0,37									
EK 160B-20		20	KK 1405-6A	0,37									
EK 160B-32		32	KK 1407 - 4A	0,55									
EK 160B-12/4		12/4	KK 1407-12/4A	0,11/0,37									
EK 160B-15/5		15/5											
EK 160B-20/6,5		20/6,5											
EK 160B-32/10	32/10	KG II 1606 - 12/4			0,24/0,76								

Type SK

SK 100B	100	-	-	-	1200	90 ... 130 130 ... 300	100	-	73	45	132	215	400
SK 125B	125	-	-	-	3650	130 ... 150 150 ... 300	115	-	89	42,5	155	240	450
SK 160B	160	-	-	-	5650	130 ... 150 150 ... 300	120	-	97	45	187	280	520